



TRIARC systems

TRIARC Easy Pin Gas Block

Read before installation!

TRIARC Easy Pin Gas Block features:

- Black Nitride Finish
- 4140 Steel Construction
- Low Profile to Fit Inside All Handguards
- .750" Internal Diameter
- Pre-Cut for Easy Pinning
- Gas Efficiency Through Exacting Tolerances

Comes with:

- Gas Block
- 2- Knurled Set Screws
- 1- 5/64 Stainless Coiled Roll Pin
- 1- 1/8 Stainless Coiled Roll Pin

Tools Needed:

- Drill Press or Hand Drill
- 1/8" drill bit
- Roll pin punch
- Hammer


The TRIARC Easy Pin Gas Block's design aids it to be quickly pinned to your barrel. The pre-cut hole means there is no wasted time by drilling through the gas block. This pre-cut hole is positioned low enough, so only the necessary amount of material from your barrel is removed to ensure a "bombproof" installation. Since there is less material to remove, pinning the barrel is easier to accomplish with a standard hand drill or drill press. We always recommend that a competent gunsmith do the installation. However, because of the gas block's design, it is much easier for the home builder to accomplish the pinning of the gas block without catastrophic damage to the barrel or gas block.

When it comes to fine-tuning your system, gas efficiency is one of the most critical variables, and the TRIARC gas block helps eliminate any gas loss from barrel to BCG. The TRIARC Easy Pin gas block features exacting tolerances in the journal and the gas tube mounting hole. These features make it efficient by giving as little room for gas to escape as possible.

Installation Notes:

Featured in the TRIARC Easy Pin Gas Block are two counterbored holes to assist in the proper alignment of the pins and drilling of your barrel. The first of these holes is for installing the gas tube roll pin, and the second is for pinning the gas block to the barrel. Since both holes are counterbored, it is imperative to remember the installation of the roll pins and the drilling must be made from right to left. In order to correctly install and drill it, the front of the gas block (face with TRIARC logo) is positioned on your right side, and the rear of the gas block (face with gas tube hole) is on your left side. When oriented this way, the right side of the gas block (from where proper installation of pins is to take place) will be faced up.

See diagram

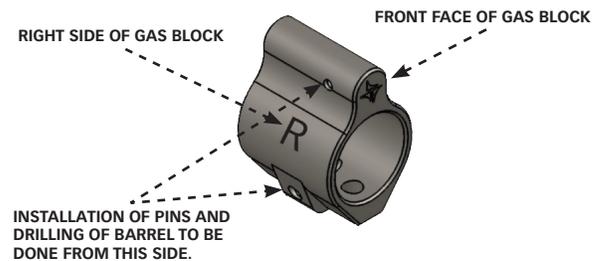

***Drill bit size for pinning is 1/8" ***

For a detailed installation video, please use the QR code below or visit our YouTube channel.

Thank you for your purchase, and keep pushing forward!

TRIARC systems
2500 U.S. 287 Frontage Rd
Mansfield, TX 76063 USA